

	720mm	920mm	1120mm
Size	720x215x215	920x215x215	1120x215x215
Flametray size	500mm	700mm	900mm
Capacity	6L	8L	10L
Fuel consumption	125 ml/h	150 ml/h	175 ml/h
Burning time	> 48 h	> 53 h	> 57 h
Net weight	14,5 kg	18,5 kg	23,5 kg

Power supply: 220V - 240V, 50 Hz

GENEREL INFORMATIO

Produced in	Denmark	
Flame levels	6 flamelevels	
Sensors	Water Level Indicator/Mist Level Indicator/ Spillage	
Powersupply	230 V	
Fuel Type	USE ONLY demineralised water	
Flue	Not required	
No internal pump	No noice, reduced maintenance, increased reliability	
Finish	Black powder-coating	
Finish top-plate	2mm black powder-coated steel	
Glass	Tempered glass, T6mm H70mm The glass is placed in customised glassholders	
Application	Indoor use only	

The Hybrid Mist Fireplace utilises advanced technology to atomise water vapour, creating a fine mist that can be electronically controlled. This mist is complemented by integrated LED lights in various colours, producing the illusion of real flames.

This burner can be implemented in various fireplace solutions; see the next page for details.

For households with small children or pets, where an open fire might be a concern, this fireplace offers an excellent alternative.

The Hybrid Mist Fireplace is available in three standard sizes.


DEMINERALISED WATER

For use and information, please visit: decoflame.com.

Please be aware that it is essential to use demineralised water for proper use and gurantee of your



HYBRID MIST CAN BE INSTALLED IN VARIOUS CONSTRUCTION OPTIONS. EG:

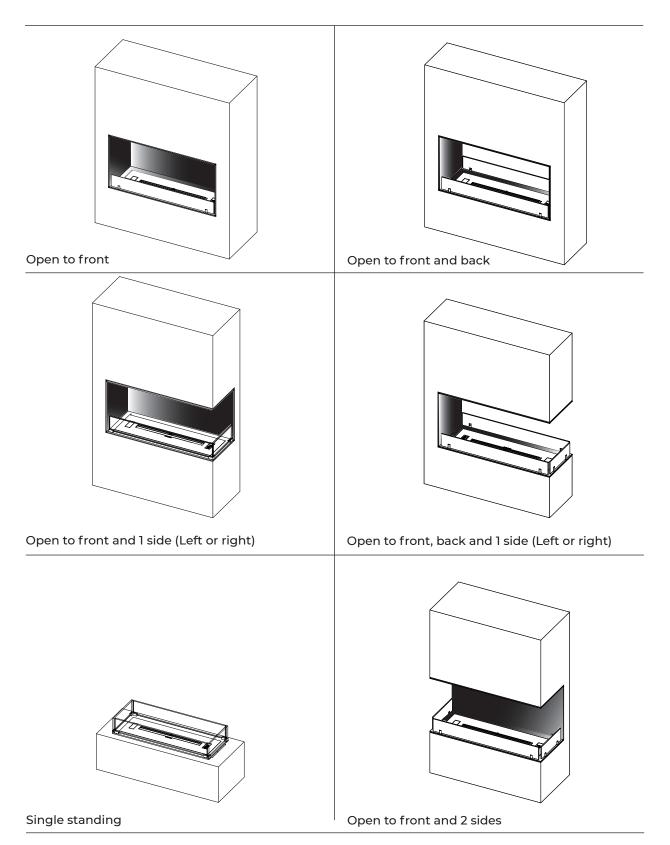

Decoflame advises the installation of glass shields to safeguard the mist from draughts, thereby maintaining its visibility and effectiveness. For certain specified solutions, the use of high glass panels or a glass door is also possible for some of the solutions. For further technical specifications and detailed information, please contact Decoflame directly.